

DISCLAIMER

GENERAL SPECIFICATIONS

- GE is not responsible for the installation of developers and associated equipment, lighting, cassette trays and protective screens or derivatives not mentioned in the order.
- The final study contains recommendations for the location of GE equipment and associated devices, electrical wiring and room arrangements. When preparing the study, every effort has been made to consider every aspect of the actual equipment expected to be installed.
- The layout of the equipment offered by GE, the dimensions given for the premises, the details provided for the pre-installation work and electrical power supply are given according to the information noted during on-site study and the wishes expressed by the customer.
- The room dimensions used to create the equipment layout may originate from a previous layout and may not be accurate as they may not have been verified on site. GE cannot take any responsibility for errors due to lack of information.
- Dimensions apply to finished surfaces of the room.
- Actual configuration may differ from options presented in some typical views or tables.
- If this set of final drawings has been approved by the customer, any subsequent modification of the site must be subject to further investigation by GE about the feasibility of installing the equipment. Any reservations must be noted.
- The equipment layout indicates the placement and interconnection of the indicated equipment components. There may be local requirements that could impact the placement of these components. It remains the customer's responsibility to ensure that the site and final equipment placement complies with all applicable local requirements.
- All work required to install GE equipment must be carried out in compliance with the building regulations and the safety standards of legal force in the country concerned.
- These drawings are not to be used for actual construction purposes. The company cannot take responsibility for any damage resulting therefrom.

CUSTOMER RESPONSIBILITIES

- It is the responsibility of the customer to prepare the site in accordance with the specifications stated in the final study. A detailed site readiness checklist is provided by GE. It is the responsibility of the customer to ensure all requirements are fulfilled and that the site conforms to all specifications defined in the checklist and final study. The GE Project Manager of Installation (PMI) will work in cooperation with the customer to follow up and ensure that actions in the checklist are complete, and if necessary, will aid in the rescheduling of the delivery and installation date.
- Prior to installation, a structural engineer of record must ensure that the floor and ceiling is designed in such a way that the loads of the installed system can be securely borne and transferred. The layout of additional structural elements, dimensioning and the selection of appropriate installation methods are the sole responsibility of the structural engineer. Execution of load bearing structures supporting equipment on the ceiling, floor or walls are the customer's responsibility.

RADIO-PROTECTION

- Suitable radiological protection must be determined by a qualified radiological physicist in conformation with local regulations. GE does not take responsibility for the specification or provision of radio-protection.

THE UNDERSIGNED, HEREBY CERTIFIES THAT I HAVE READ AND APPROVED THE PLANS IN THIS DOCUMENT.		
DATE	NAME	SIGNATURE

GLOBAL SITE READINESS CHECKLIST (DI)

DOC1809666 Rev. 7

Site Ready Checks at Installation
EHS Site Requirements
Overall access route to the scan room free from obstruction / high hazards.
Enough space to store tools, equipment, parts, install waste and the general area free from obstruction and trip hazards.
Enough necessary facilities for the GE employees available.
No 3rd parties working in the area that may affect the safety of the installation activity.
Area free from any chemical, gas, dust, welding fume exposure and has painting been completed and dry.
All emergency routes identified, signed and clear from obstruction.
Accessible single source lockable panel that LOTO can be applied to for GE equipment installation (MDP and/or PDU).
There are no other conditions or hazards that you have observed or have been made aware of by the customer or contractors on site.
Required for Mechanical Install start
Room dimensions, including ceiling height, for all Exam, Equipment/Technical & Control rooms meets GE specifications.
Ceiling support structure, if indicated on the GE drawing, is in the correct location and at the correct height according to the Original Equipment Manufacturer specifications.
Levelness and spacing has been measured, and is ready for the installation of any GE supplied components.
Overhead support Structure (unistrut) has been confirmed with customer/contractor to meet required GE provided criteria.
Finished ceiling is installed. If applicable ceiling tiles installed per PMI discretion.
Floor levelness/flatness is measured and within tolerance, and there are no visible defects per GEHC specifications.
Entry door threshold meets PIM requirement.
Rooms that will contain equipment, including staging areas if applicable, are construction debris free. Precautions must be taken to prevent debris from entering rooms containing equipment.
Cable ways (floor/wall/ceiling/Access Flooring) are available for installation of GE cables are of correct length and diameter.
Cable ways routes per GE Final drawings and cable access openings areas installed at a time determined by GEHC PM. Surface floor duct can be installed at time of system installation.
Adequate room illumination installed and working.
Customer supplied countertops where GE equipment will be installed are in place.
Required for Calibration Start
HVAC systems Installed, and the site meets minimum environmental operational system requirements.
System power & grounding (PDB/MDP) is available as per GE specifications.
System power & grounding (PDB/MDP) is installed at point of final connection and ready to use. Lock Out Tag Out is available.
PMI to confirm all feeder wires and breaker are size appropriately. EPO installed if needed.
PMI to confirm with electrician all power and signal cables are well terminated ensuring there are no loose connections.
Network outlets installed.
Computer network available and working.
Lead doors and windows complete or scheduled to be installed. If applicable, radiation protection (shielding) finished & radioprotection regulatory approval for installation obtained.

Note: The details shown here are only an extract from DOC1809666. For the complete document please contact your PMI.

ENVIRONMENT

ALTITUDE

- The system’s normal operational altitude range is -150 m to 2,400 m [492 ft to 7,875 ft], relative to sea level.
- The system can be installed at an altitude up to, but not exceeding, 3,000 m [9,843 ft] above sea level. System performance, image quality, reliability and safety cannot be guaranteed at altitudes above 3,000 m.

MAGNETIC FIELD SPECIFICATIONS

- Limit the magnetic interference to guarantee specified imaging performance.

GANTRY:

- Ambient static magnetic field is less than 1 Gauss.
- Ambient AC magnetic field is less than 0.01 Gauss peak.

OPERATOR CONSOLE:


- Ambient static magnetic field is less than 10 Gauss.

MAXIMUM AUDIBLE NOISE LEVEL OF THE SYSTEM

- The maximum sound level produced by the gantry occurs during a CT scan acquisition and is highly dependent upon the acoustic characteristics of the room in which the scanner is installed. The acoustic characteristics of the room include the room area and height, distance of the system from the nearest wall, other walls, floor and ceiling material, size of air ducts, gaps under doors and more.
- If the acoustic characteristics of the room are handled properly, the sound level may reach as low as 75 dBA, when measured at a distance of one meter [3.3 ft] from the nearest gantry surface, in any direction.

CUSTOMER SITE READINESS REQUIREMENTS

- Any deviation from these drawings must be communicated in writing to and reviewed by your local GE healthcare installation project manager prior to making changes.
- Make arrangements for any rigging, special handling, or facility modifications that must be made to deliver the equipment to the installation site. If desired, your local GE healthcare installation project manager can supply a reference list of rigging contractors.
- New construction requires the following;
 1. Secure area for equipment,
 2. Power for drills and other test equipment,
 3. Capability for image analysis,
 4. Restrooms.
- Provide for refuse removal and disposal (e.g. crates, cartons, packing)
- For CT, MR, PET/CT, and SPECT systems it is required to minimize vibrations within the scan room. It is the customer's responsibility to contract a vibration consultant/engineer to implement site design modifications to meet the GE vibration specification. Refer to the system preinstallation manual for vibration specifications.

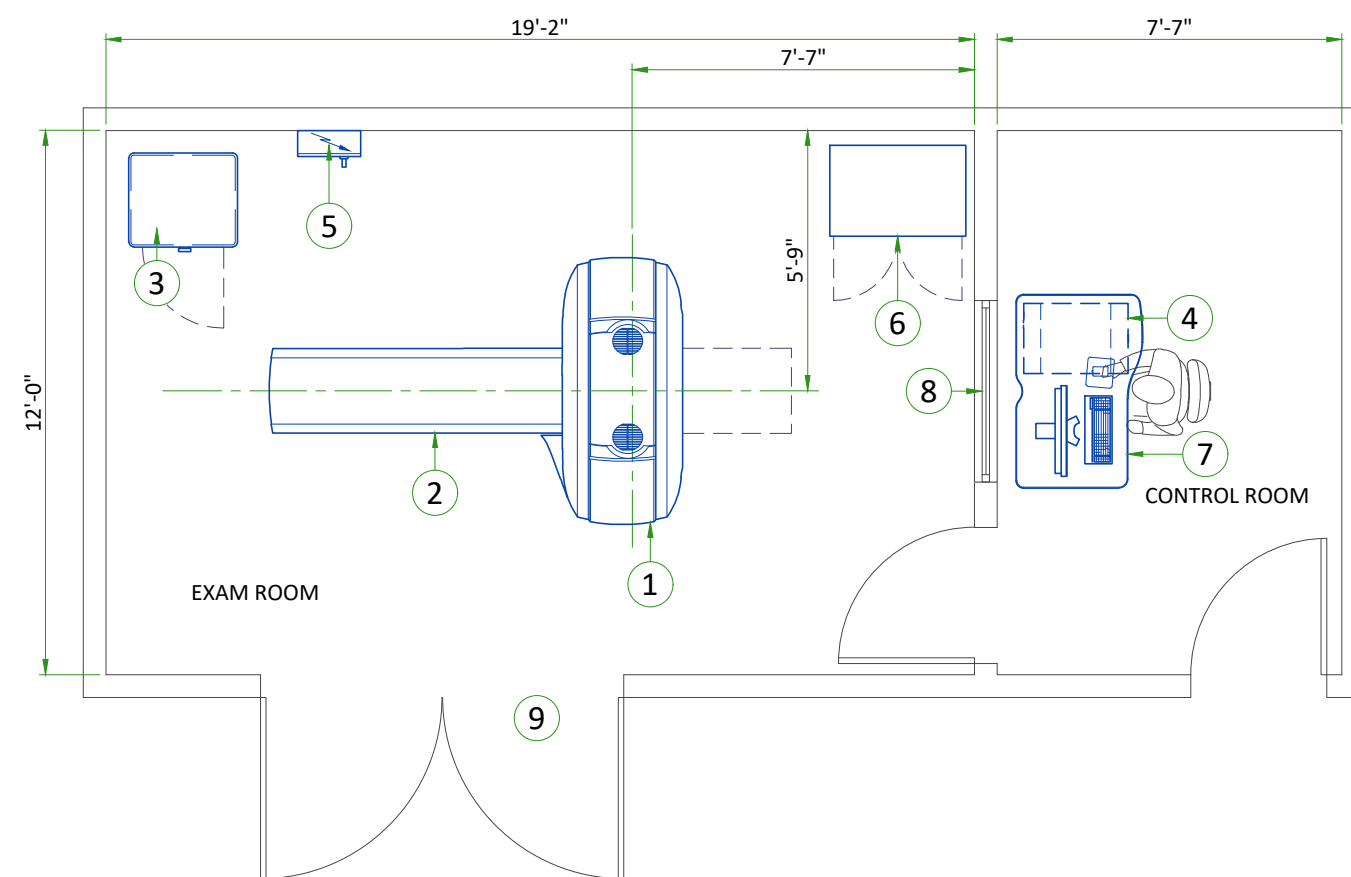

LEGEND						
A	GE Supplied			D	Available from GE	
B	GE Supplied/contractor installed			E	Equipment existing in room	
C	Customer/contractor supplied and installed			*	Item to be reinstalled from another site	
BY	ITEM	DESCRIPTION	MAX HEAT OUTPUT (btu)	WEIGHT (lbs)	MAX HEAT OUTPUT (W)	WEIGHT (kg)
A	1	Gantry	20500	3626	6000	1645
A	2	Patient Table	-	1025	-	465
A	3	Power Distribution Unit	1200	804	352	365
A	4	Operators Console & Monitor	5800	119	1700	54
B/D	5	Main Disconnect Panel	-	-	-	-
A/D	6	Service Cabinet	-	90	-	41
A/D	7	Workstation Desk	-	132	-	60
C	8	Lead glass window				
C	9	Minimum door opening for equipment delivery is 44 in. w x 83 in. h [1118mm x 2108mm], contingent on a 96 in. [2438mm] corridor width				

EXAM ROOM HEIGHT	
Finished ceiling height	min. 7'-6"

RADIATION PROTECTION DETAILS

SHIELDING REQUIREMENTS:

Engage a qualified radiological health physicist to review your scan room shielding requirements, taking into consideration:

- Scatter radiation levels within the scanning room
- Equipment placement
- Weekly projected work-loads (number of patients/day technique (kvp*ma))
- Materials used for construction of walls, floors, ceiling, doors, and windows
- Activities in surrounding scan room areas
- Equipment in surrounding scan room areas (e.g., film developer, film storage)
- Room size and equipment placement within the room relative to room size

In case of mounting a Basic Collimator, the results described in the figures below are for a 32 cm PMMA phantom in µGy/100 mA. The illustrations in this section depict measured radiation levels within the scanning room, while scanning a 32 cm CTDI phantom placed on the patient table, with the technique shown. Use the mAs, kV and aperture scaling factors in the table below to adjust exposure levels to the scan technique used at the site.

CT Conditions of Operation	
Scan Mode	Axial-Cine
Scan FOV (mm)	250
Detector Coverage (mm)	140
Tube Voltage (kVp)	140
Tube Current (mA)	400
Rotation Time (s)	0.5
Scan Time (s)	1
CTDI Phantom Size (diameter, cm)	32
CTDI Phantom Size (length, cm)	25

NOTE:

- Actual measurements can vary. Expected deviation equals ±15%. The maximum deviation anticipated for tube output equals ±40%.
- This publication uses µGy (micrograys) to measure radiation levels. The conversion factor from mR to µGy (micrograys) is 1 mR = 8.69 µGy.


Radiation Protection on the Horizontal Plane at the ISO (µGy/100mA)									
Z-axis (m)	X-axis (m)								
	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2
-3.5	3.09	3.35	3.61	3.09	2.32	2.58	2.58	2.58	2.32
-3	3.86	5.95	4.38	4.12	3.35	3.86	4.89	3.86	2.58
-2.5	2.82	5.15	5.41	6.18	5.41	5.92	5.15	4.89	2.58
-2	2.32	4.89	7.73	9.27	9.01	8.76	7.98	5.15	2.32
-1.5	1.03	3.86	12.62	16.48	16.74	16.48	11.07	4.64	1.29
-1	0.26	1.03	4.38	32.96	37.34	33.99	9.27	1.29	0.00
-0.5	0.00	0.00	0.00	ISO			0.00	0.00	0.00
0	0.00	0.00	0.00				0.77	0.26	0.00
0.5	0.26	1.03	3.86	69.27	114.85	52.53	3.35	1.29	0.52
1	2.58	3.86	15.45	26.27	24.27	26.27	13.39	3.61	3.09
1.5	2.83	5.41	14.16	15.54	11.07	12.36	11.33	6.18	3.09
2	1.80	3.09	6.18	6.95	7.47	9.79	6.44	3.86	2.06
2.5	-	-	-	3.35	4.64	4.89	0.26	-	-

Radiation Protection on the Vertical Plane at the ISO (μGy/100mA)												
Y-axis (m)	Z-axis (m)											
	-3.5	-3	-2.5	-2	-1.5	-1	-0.5	0	0.5	1	1.5	2
1.5	2.32	2.83	2.83	4.12	2.06	0.52	0.00	0.00	0.00	0.77	4.12	1.03
1	2.83	3.86	5.92	7.47	7.73	1.89	0.00	0.00	0.39	6.18	9.01	6.18
0.5	2.58	3.61	4.89	7.98	12.62	17.51	ISO		14.42	14.42	8.76	5.41
0	2.32	3.35	5.41	9.01	16.74	37.34			114.85	24.72	11.07	7.47
-0.5	0.00	0.00	0.00	Table					22.66	20.86	10.82	6.18


NOTE:

- In the figures below, dark gray boxes indicate areas in which it was not possible to collect data due to the physical scanner body
- In the figures below, light gray boxes indicate the patient table position relative to the scanner body
- 0.00 indicates a value less than 0.1 µGy

GANTRY WITH TABLE

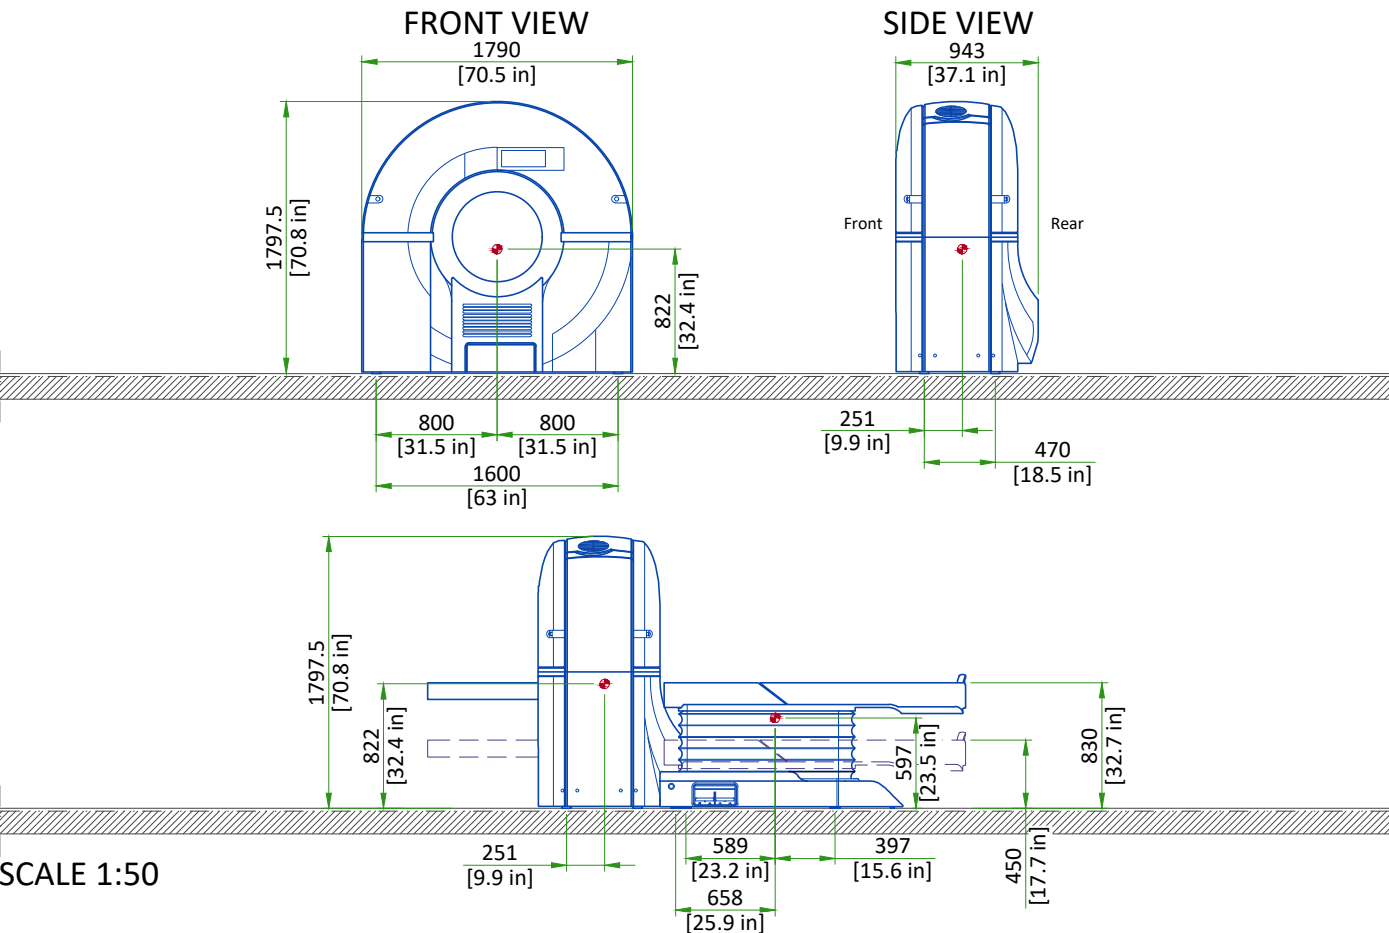


POWER DISTRIBUTION UNIT (PDU)

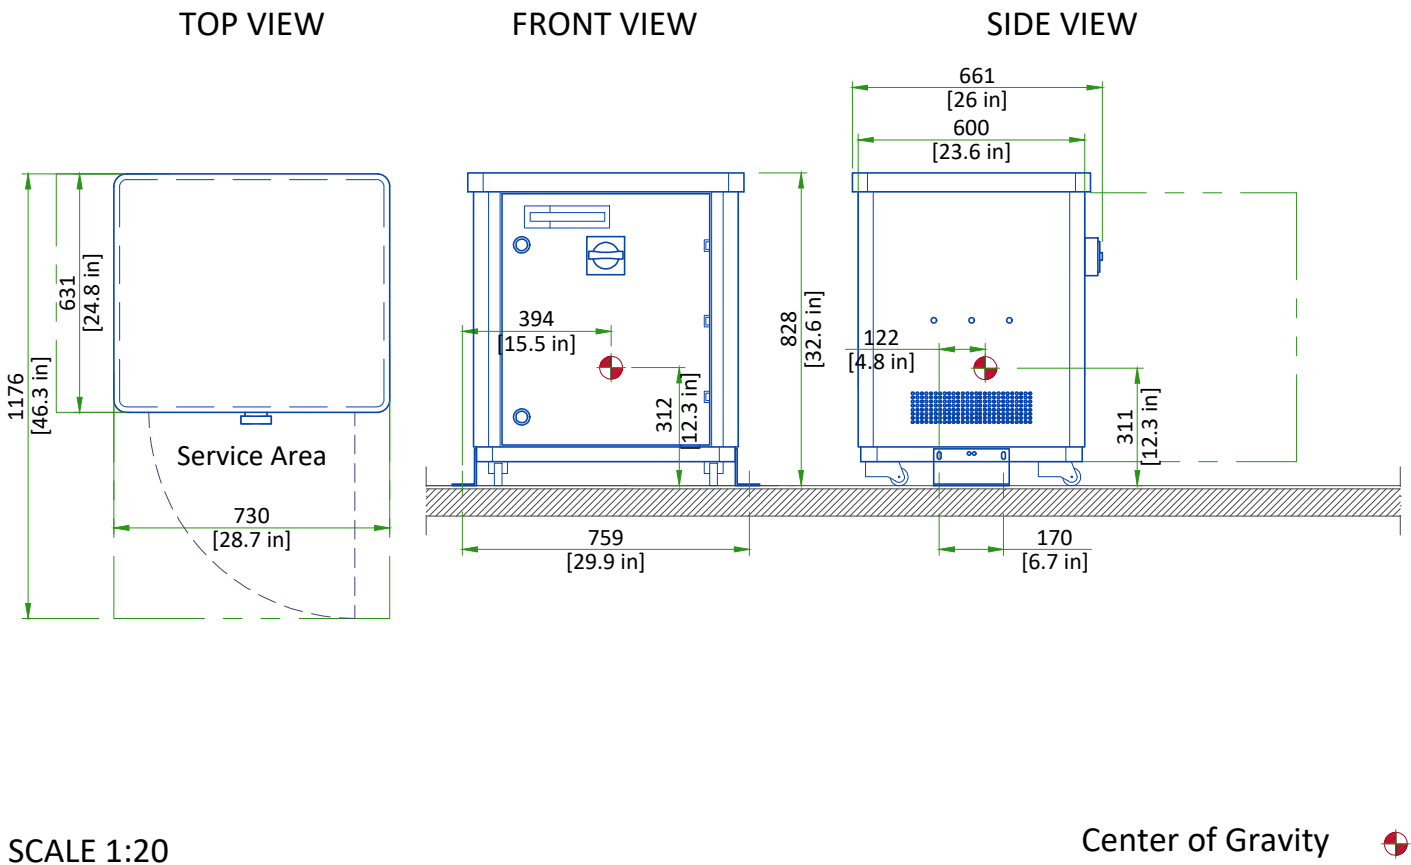

Center of Gravity


OPERATOR CONSOLE AND AURORA SWS TABLE

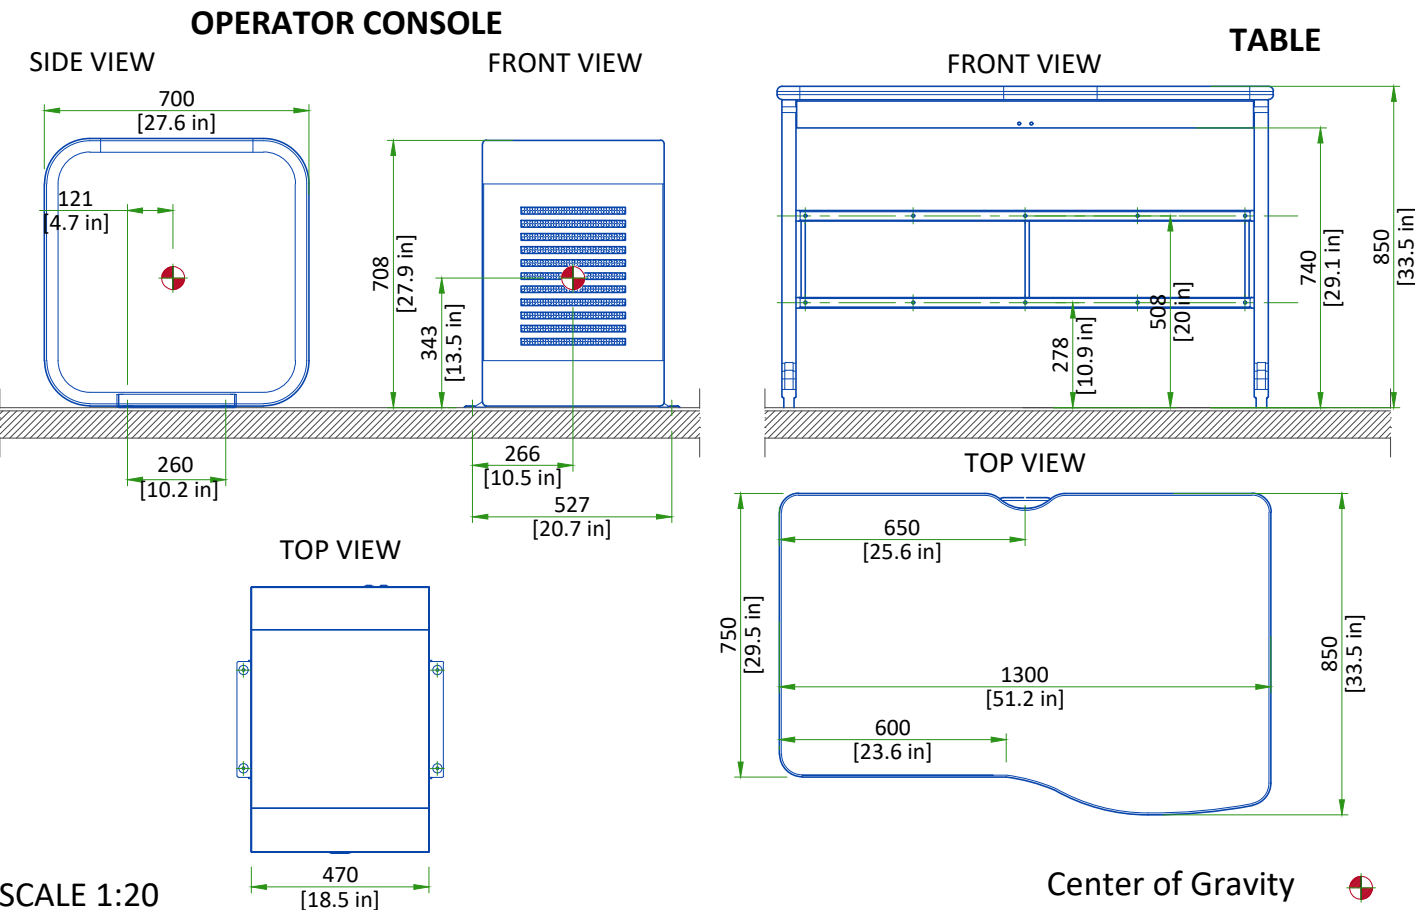


Center of Gravity

MAIN DISCONNECT PANEL


TOP VIEW

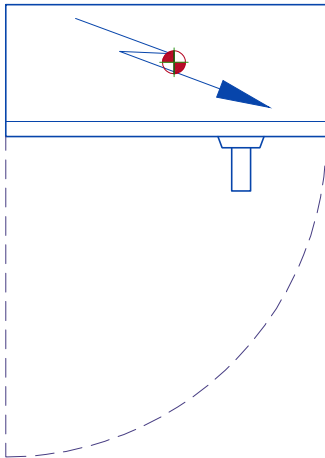


FRONT VIEW

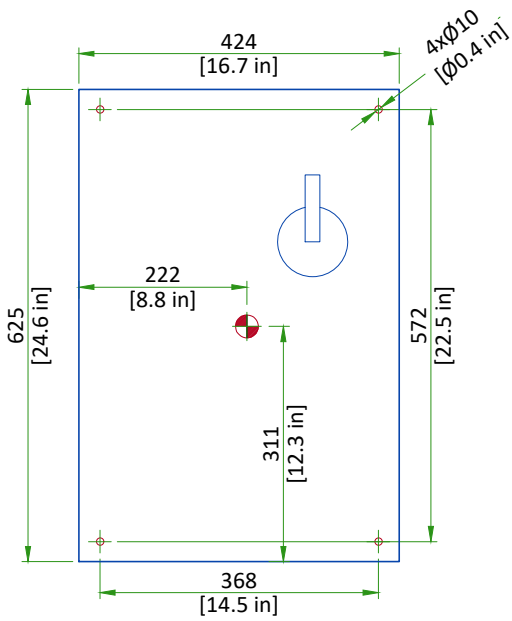

SIDE VIEW

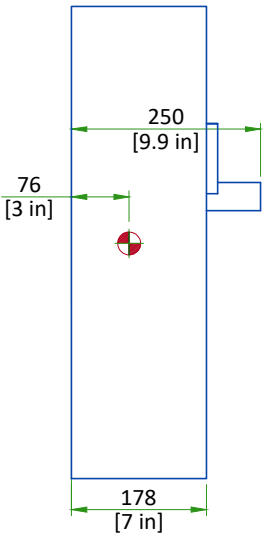

Center of gravity 
SCALE 1:10


DELIVERY

THE CUSTOMER/CONTRACTOR SHOULD:

- Provide an area adjacent to the installation site for delivery and unloading of the GE equipment.
- Ensure that the dimensions of all doors, corridors, ceiling heights are sufficient to accommodate the movement of GE equipment from the delivery area into the definitive installation room.
- Ensure that access routes for equipment will accommodate the weights of the equipment and any transportation, lifting and rigging equipment.
- Ensure that all necessary arrangements for stopping and unloading on public or private property not belonging to the customer have been made.

DIMENSIONS OF DELIVERY WITH DOLLY TRANSPORT EQUIPMENT					
EQUIPMENT	DIMENSIONS			WEIGHT	
GANTRY	LENGTH	2733 mm	107.5 in	2131 kg	4697 lbs
	WIDTH	943 mm	37.1 in		
	HEIGHT	1798 mm	70.7 in		
PATIENT TABLE	LENGTH	2224 mm	86 in	490 kg	1080 lbs
	WIDTH	885 mm	35 in		
	HEIGHT	908 mm	36 in		

GANTRY DELIVERY

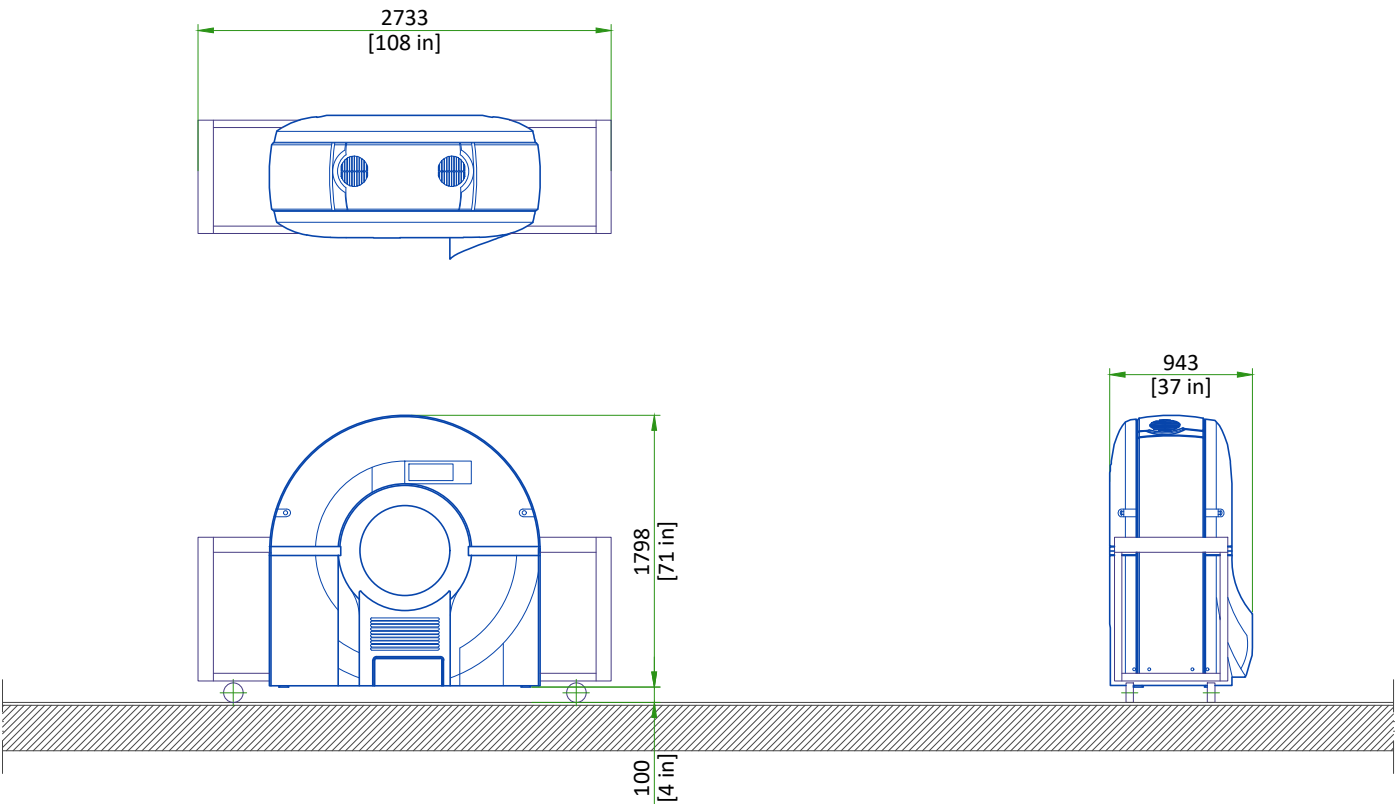


- The gantry is shipped on a dolly equipped with elevating casters (normal shipping configuration).

SCALE 1:50


STRUCTURAL NOTES

- all steel work and parts necessary to support ceiling mounted equipment is to be supplied by the customer or his contractors.
- methods of support for the steelwork that will permit attachment to structural steel or through bolts in concrete construction should be favored. Do not use concrete or masonry anchors in direct tension.
- all units that are wall mounted or wall supported are to be provided with supports where necessary. Wall supports are to be supplied and installed by the customer or his contractors. See plan and detail sheets for suggested locations and mounting hole locations.
- all ceiling mounted fixtures, air vents, sprinklers, etc. To be flush mounted, or shall not extend more than 1/4" below the finished ceiling.
- floor slabs on which equipment is to be installed must be level to 1/4" in 10'-0"
- dimensions are to finished surfaces of room.
- customers contractor must provide all penetrations in post tension floors.
- customers contractor must provide and install any non-standard anchoring. Documents for standard anchoring methods are included with GE equipment drawings for geographic areas that require such documentation.
- customers contractor must provide and install hardware for "through the floor" anchoring and/or any bracing under access floors. This contractor must also provide floor drilling that cannot be completed because of an obstruction encountered while drilling by the GE installer such as rebar etc.
- it is the customer's responsibility to perform any floor or wall penetrations that may be required. The customer is also responsible for ensuring that no subsurface utilities (e.g., electrical or any other form of wiring, conduits, piping, duct work or structural supports (i.e. post tension cables or rebar)) will interfere or come in contact with subsurface penetration operations (e.g. drilling and installation of anchors/screws) performed during the installation process. To ensure worker safety, GE installers will perform surface penetration operations only after the customer's validation and completion of the "GE surface penetration permit"

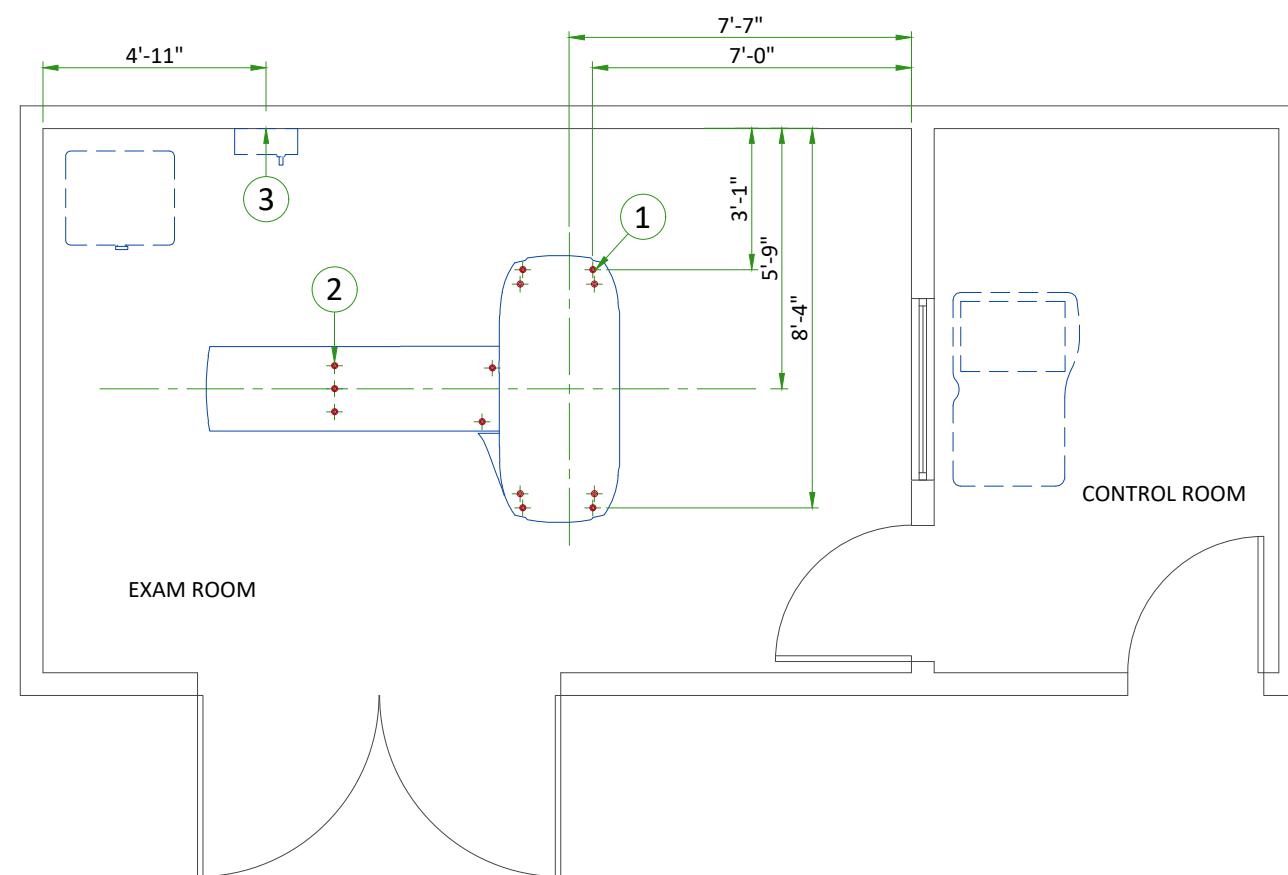

ITEM	DESCRIPTION
(CONTRACTOR SUPPLIED & INSTALLED)	
1	Gantry anchoring pads. See Structural Detail
2	Table anchoring pads. See Structural Detail
3	Support Backing, locate as shown

ANCHORING/LOADING DISTRIBUTION TO THE FLOOR

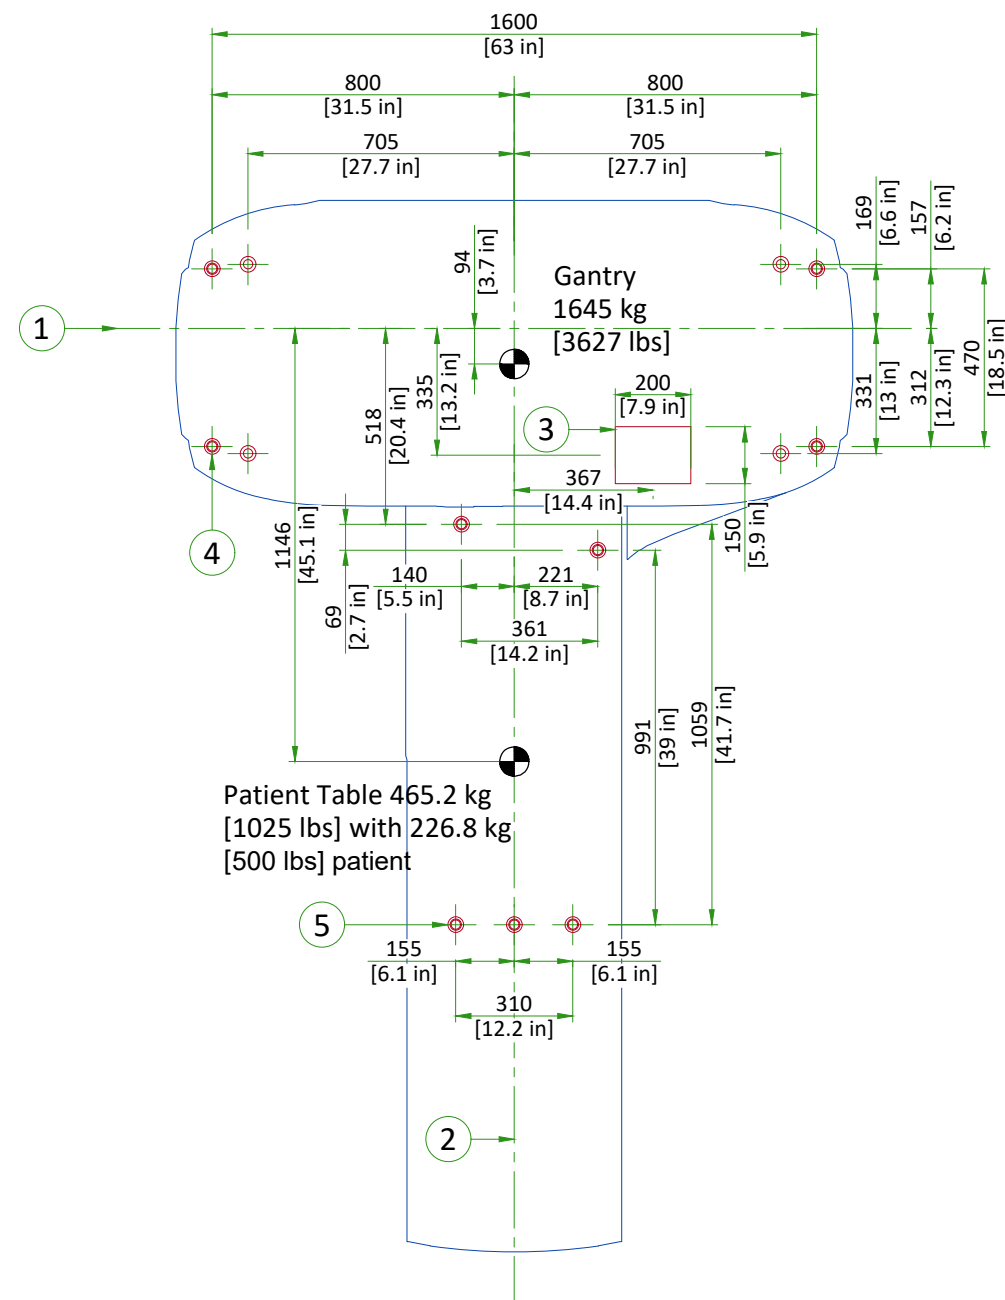


- (1) Tilting axis
(2) Longitudinal axis
(3) Cable inlet area (200x150 mm [7.9 inx5.9 in])
(4) 8 Gantry anchoring points
(5) 5 Table anchoring points
● Center of gravity
● Main anchoring points
● Backup anchoring points

SCALE 1:20

FLOOR REQUIREMENTS

GE SUPPLIED ANCHORS (TABLE/GANTRY)

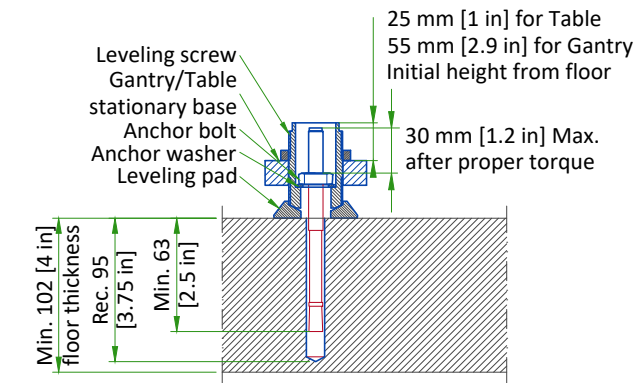

NOTES:

- The recommended nominal anchor embedment before torquing anchors is 75 mm [2.9 in], minimum is 63 mm [2.5 in]
- Anchors must be installed no less than 100 mm [3.9 in] from the edge of the concrete slab or expansion joint
- Torque anchor to 60 Nm [44 ft-lb]
- In case of seismic site the type and length of the anchor must be defined in the alternative seismic anchoring plan and purchased separately by the customer. The seismic kit provided by GE Healthcare is designed for anchors that are 5/8 in (15.9 mm) in diameter.

FINISHED FLOOR REQUIREMENTS

- Installation requires a finish floor in the scan and control rooms
- The floor surface in the scan room directly under the gantry and table must be level.
- The floor levelness tolerance of the floor surface that the gantry and table will rest on is 6 mm [0.25 in] over a 3000 mm [118.2 in] distance.
- Shims should not be used to compensate for a floor that does not meet this requirement.
- Eight or more floor covering openings that are 102 mm [4 in] in diameter are made to ensure the table and gantry rest on a solid surface. These floor penetrations can be sealed if required.
- These requirements apply to all installation types.

NOT TO SCALE

TEMPERATURE AND HUMIDITY SPECIFICATIONS

IN-USE CONDITIONS

Temperature	Exam Room			Control Room		
	Min	Recommended	Max	Min	Recommended	Max
	20°C	22°C	24°C	18°C	22°C	26°C
	68°F	72°F	75°F	64°F	72°F	79°F
Temperature Gradient	≤ 3°C/h			≤ 3°C/h		
	≤ 5.4°F/h			≤ 5.4°F/h		
Relative humidity (1)	30% to 60%			30% to 70%		
Humidity Gradient	≤ 5%/h			≤ 5%/h		

STORAGE CONDITIONS

Temperature	+4°C to +35°C
	40° to 95°F
Temperature Gradient	≤ 3°C/h
	≤ 5.4°F/h
Relative humidity (1)	20 to 60%
Humidity Gradient	≤ 5%/h

Storage longer than 6 months is not recommended.

(1) Non-condensing

AIR RENEWAL

According to local standards.

NOTE

In case of using air conditioning systems that have a risk of water leakage it is recommended not to install it above electric equipment or to take measures to protect the equipment from dropping water.

HEAT DISSIPATION DETAILS

ROOM	DESCRIPTION	Max (kW)	Max (BTU)
Exam Room	Gantry and Patient Table	6.00	20500
	TOTAL	6.00	20500
Exam Room or Technical Room*	Power Distribution Unit	0.35	1200
	TOTAL	0.35	1200
Control Room	Operator Console	1.70	5800
	TOTAL	1.70	5800
*Technical Room is not mandatory, the placements of these elements are recommended in the Exam Room.			

ELECTRICAL NOTES

1. All wires specified shall be copper stranded, flexible, thermo-plastic, color coded, cut 10 foot long at outlet boxes, duct termination points or stubbed conduit ends. All conductors, power, signal and ground, must be run in a conduit or duct system. Electrical contractor shall ring out and tag all wires at both ends. Wire runs must be continuous copper stranded and free from splices.
- 1.1. Aluminum or solid wires are not allowed.
2. Wire sizes given are for use of equipment. Larger sizes may be required by local codes.
3. It is recommended that all wires be color coded, as required in accordance with national and local electrical codes.
4. Conduit sizes shall be verified by the architect, electrical engineer or contractor, in accordance with local or national codes.
5. Convenience outlets are not illustrated. Their number and location are to be specified by others. Locate at least one convenience outlet close to the system control, the power distribution unit and one on each wall of the procedure room. Use hospital approved outlet or equivalent.
6. General room illumination is not illustrated. Caution should be taken to avoid excessive heat from overhead spotlights. Damage can occur to ceiling mounting components and wiring if high wattage bulbs are used. Recommend low wattage bulbs no higher than 75 watts and use dimmer controls (except MR). Do not mount lights directly above areas where ceiling mounted accessories will be parked.
7. Routing of cable ductwork, conduits, etc., must run direct as possible otherwise may result in the need for greater than standard cable lengths (refer to the interconnection diagram for maximum usable lengths point to point).
8. Conduit turns to have large, sweeping bends with minimum radius in accordance with national and local electrical codes.
9. A special grounding system is required in all procedure rooms by some national and local codes. It is recommended in areas where patients might be examined or treated under present, future, or emergency conditions. Consult the governing electrical code and confer with appropriate customer administrative personnel to determine the areas requiring this type of grounding system.
10. The maximum point to point distances illustrated on this drawing must not be exceeded.
11. Physical connection of primary power to GE equipment is to be made by customers electrical contractor with the supervision of a GE representative. The GE representative would be required to identify the physical connection location, and insure proper handling of GE equipment.
12. GEHC conducts power audits to verify quality of power being delivered to the system. The customer's electrical contractor is required to be available to support this activity.

- All junction boxes, conduit, duct, duct dividers, switches, circuit breakers, cable tray, etc., are to be supplied and installed by customers electrical contractor.
- Conduit and duct runs shall have sweep radius bends
- Conduits and duct above ceiling or below finished floor must be installed as near to ceiling or floor as possible to reduce run length.
- Ceiling mounted junction boxes illustrated on this plan must be installed flush with finished ceiling.
- All ductwork must meet the following requirements:

1.Ductwork shall be metal with dividers and have removable, accessible covers.

2.Ductwork shall be certified/rated for electrical power purposes.

3.Ductwork shall be electrically and mechanically bonded together in an approved manner.

4.PVC as a substitute must be used in accordance with all local and national codes.
- All openings in raceway and access flooring are to be cut out and finished off with grommet material by the customers contractor.
- General contractor to insert pull cords for all cable run conduits between the equipment room and the operators control room.
- 10 foot pigtails at all junction points.
- Grounding is critical to equipment function and patient safety. Site must conform to wiring specifications shown on this plan.


CONNECTIVITY REQUIREMENTS

Broadband Connections are necessary during the installation process and going forward to ensure full support from the Engineering Teams for the customers system. Maximum performance and availability for the customers system is maintained and closely monitored during the lifetime of the system.

Proactive and reactive maintenance is available utilizing the wide range of digital tools using the connectivity solutions listed below:


- Site-to-Site VPN/GE Solution
- Site-to-Site VPN/Customer Solution
- Connection through Dedicated Service Network
- Internet Access - connectivity for InSite 2.0

The requirements for these connectivity solutions are explained in the broadband solutions catalogue (separate document).

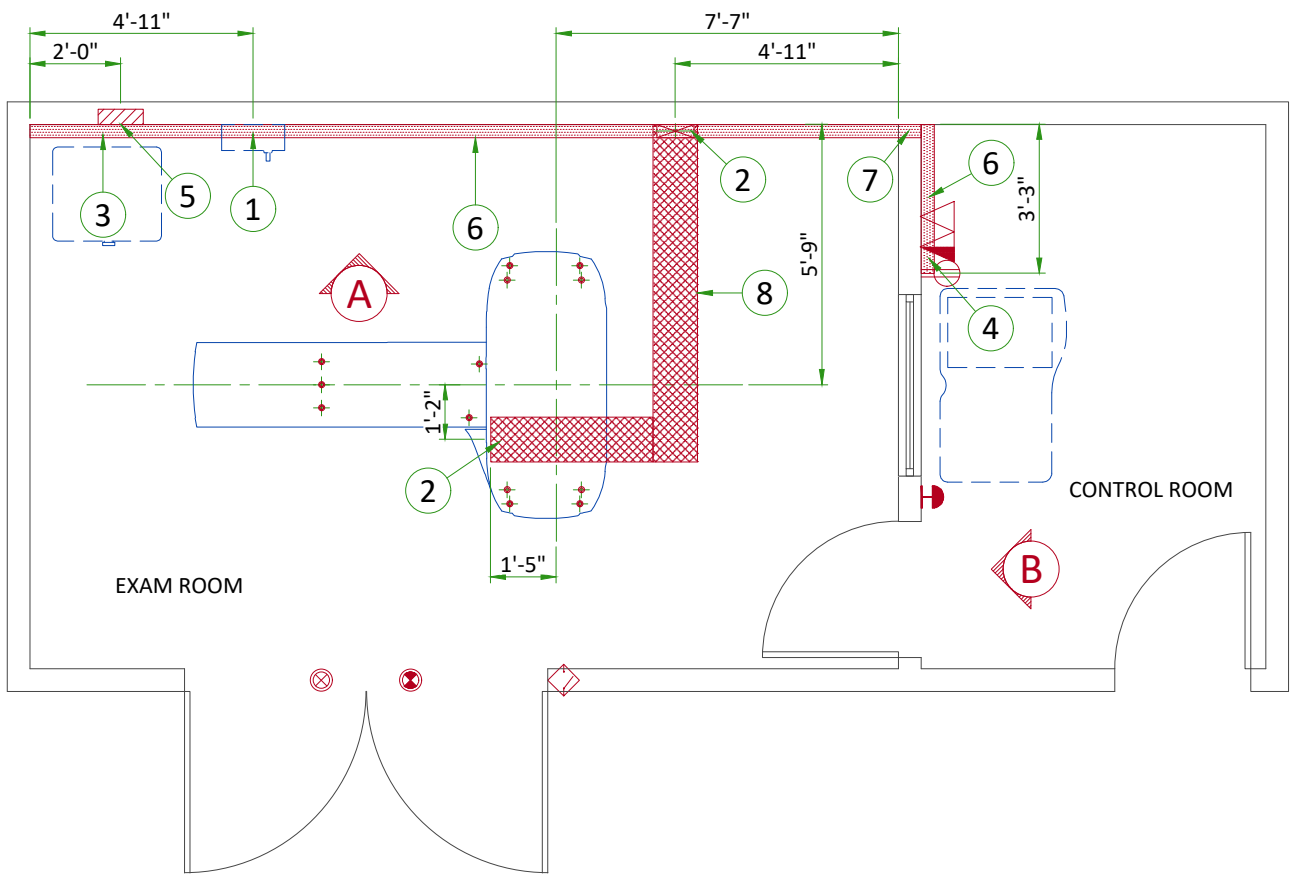


ITEM	DESCRIPTION	
1	Main disconnect panel	
2	Suitable chase nipples (gantry)	
3	Grommets opening (PDU)	
4	Grommets opening (Operators Console)	
5	12" x 16" x 4" [300 x 400 x 100] box (PDU)	
6	10" x 3 1/2" [250 x 100] surface wall duct with minimum 2 dividers	
7	10" x 3 1/2" [250 x 100] duct thru wall with minimum 2 dividers	
8	12" x 3" [300 x 100] trench duct with minimum 2 dividers	
ITEM	QTY	Outlet Legend for GE Equipment
		System emergency off (SEO), (recommended height 1.2m [48"] above floor)
		X-Ray room warning light control panel
		X-Ray ON lamp (L1) - 24V
		Door interlock switch (needed only if required by state/local codes)
		Duplex hospital grade, dedicated wall outlet 120-v, single phase power
		Network outlet
		Dedicated telephone line(s)

Additional Conduit Runs (Contractor Supplied and Installed)					
From (Bubble # / Item)	To (Bubble # / Item)	Qty	Size		
			In.	mm	
1 Main Disconnect	3 Phase Power	1	As req'd	As req'd	
	Emergency Off	1	1/2	13	
5 Power Distribution Unit	Power Distribution Unit	1	As req'd	As req'd	
	Door Switch	1	1/2	13	
Warning Light	Warning Light Control	1	1/2	13	
1 Phase Power		1	1/2	13	

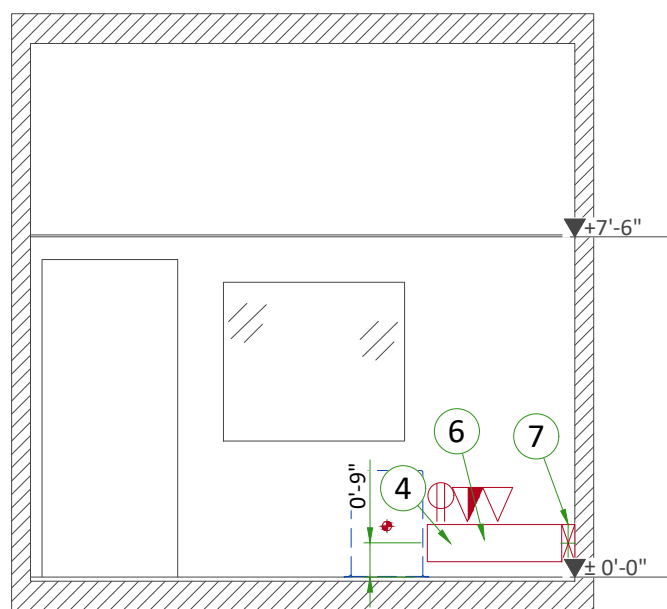

A

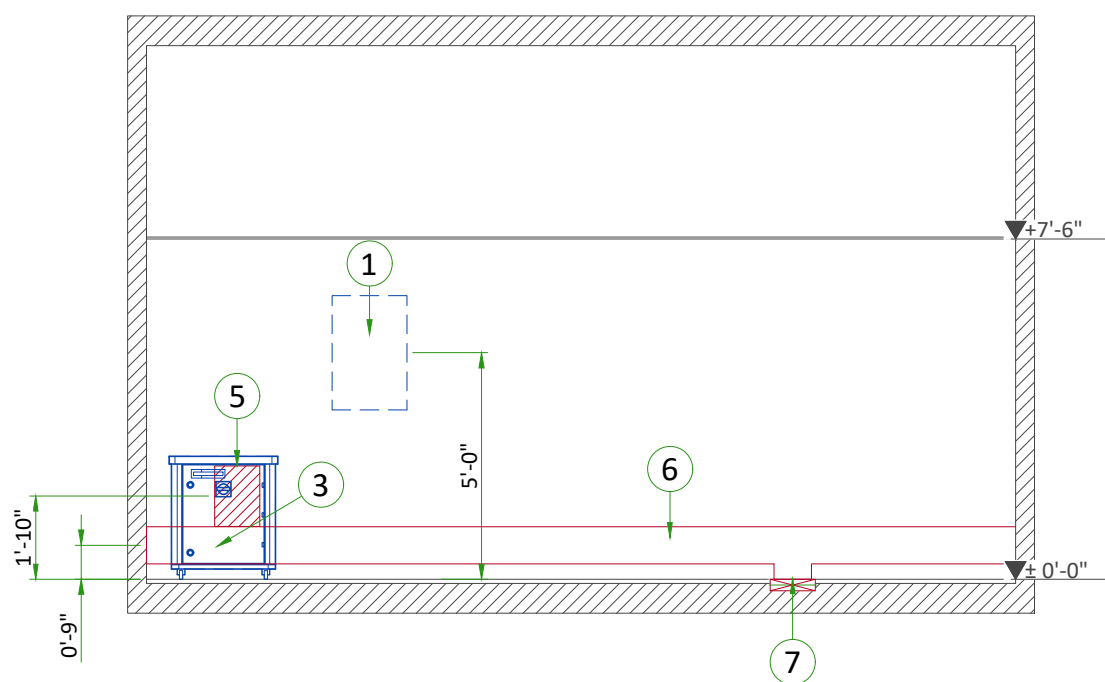

B

POWER REQUIREMENTS

POWER SUPPLY	3 PHASES+G 380/400/420/440/460/480 V ± 10%
FREQUENCIES	50/60 Hz ± 3 Hz
MAXIMUM POWER DEMAND	115 kVA
AVERAGE (CONTINUOUS) POWER DEMAND	10 kVA
POWER FACTOR	0.85

- Power supply should come into a Main Disconnect Panel (MDP) containing the protective units and controls.
- The section of the supply cable should be calculated in accordance with its length and the maximum permissible voltage drops.
- There must be discrimination between supply cable protective device at the beginning of the installation (main low-voltage transformer side) and the protective devices in the MDP.

SUPPLY CHARACTERISTICS

- Power input must be separate from any others which may generate transients (elevators, air conditioning, radiology rooms equipped with high speed film changers...).
- All equipment (lighting, power outlets, etc...) installed with GE system components must be powered separately.
- Phase imbalance 2% maximum.
- Transients must be less than 1500V peak. (on a 400V line)

GROUND SYSTEM

- System of equipotential grounding.
- Equipotential: The equipotential link will be by means of an equipotential bar. This equipotential bar should be connected to the protective earth conductors in the ducts of the non GE cableways and to additional equipotential connections linking up all the conducting units in the rooms where GE system units are located.

CABLES

- All cables must be isolated and flexible, cable color codes must comply with standards for electrical installation.
- The cables from signaling and remote control (Y, SEO, L...) will go to MDP with a pigtail length of 1.5m [59 in], and will be connected during installation. Each conductor will be identified and isolated (screw connector).


CABLEWAYS

The general rules for laying cableways should meet the conditions laid down in current standards and regulations, with regard to:

- Protecting cables against water (cableways should be waterproof).
- Protecting cables against abnormal temperatures (proximity to heating pipes or ducts).
- Protecting cables against temperature shocks.
- Replacing cables (cableways should be large enough for cables to be replaced).
- Metal cableways should be grounded.

FEEDER TABLE								
MIN. FEEDER WIRE SIZE, AWG OR MCM (sq. mm)/VAC	MINIMUM FEEDER WIRE LENGTH - ft (m)							
	50 (15)	100 (30)	150 (46)	200 (61)	250 (76)	300 (91)	350 (107)	400 (122)
480 VAC	4 (25)	4 (25)	4 (25)	4 (25)	4 (25)	4 (25)	4 (25)	3 (30)
GENERAL NOTES								
In all cases qualified personnel must verify that the feeder (at the point of take-off) and the run to the CT system meet all the requirements stated in the PIM								
For a single unit installation, the minimum transformer size is 115 kVA, with 2.4% rated regulation at unity power factor. Resultant maximum allowable feeder regulation is 3.4%								
Grounding conductor will be a 4 (25) minimum. This ground will run from the equipment back to the power source/main grounding point and always travel in the same conduit with the feeders								

POWER DISTRIBUTION

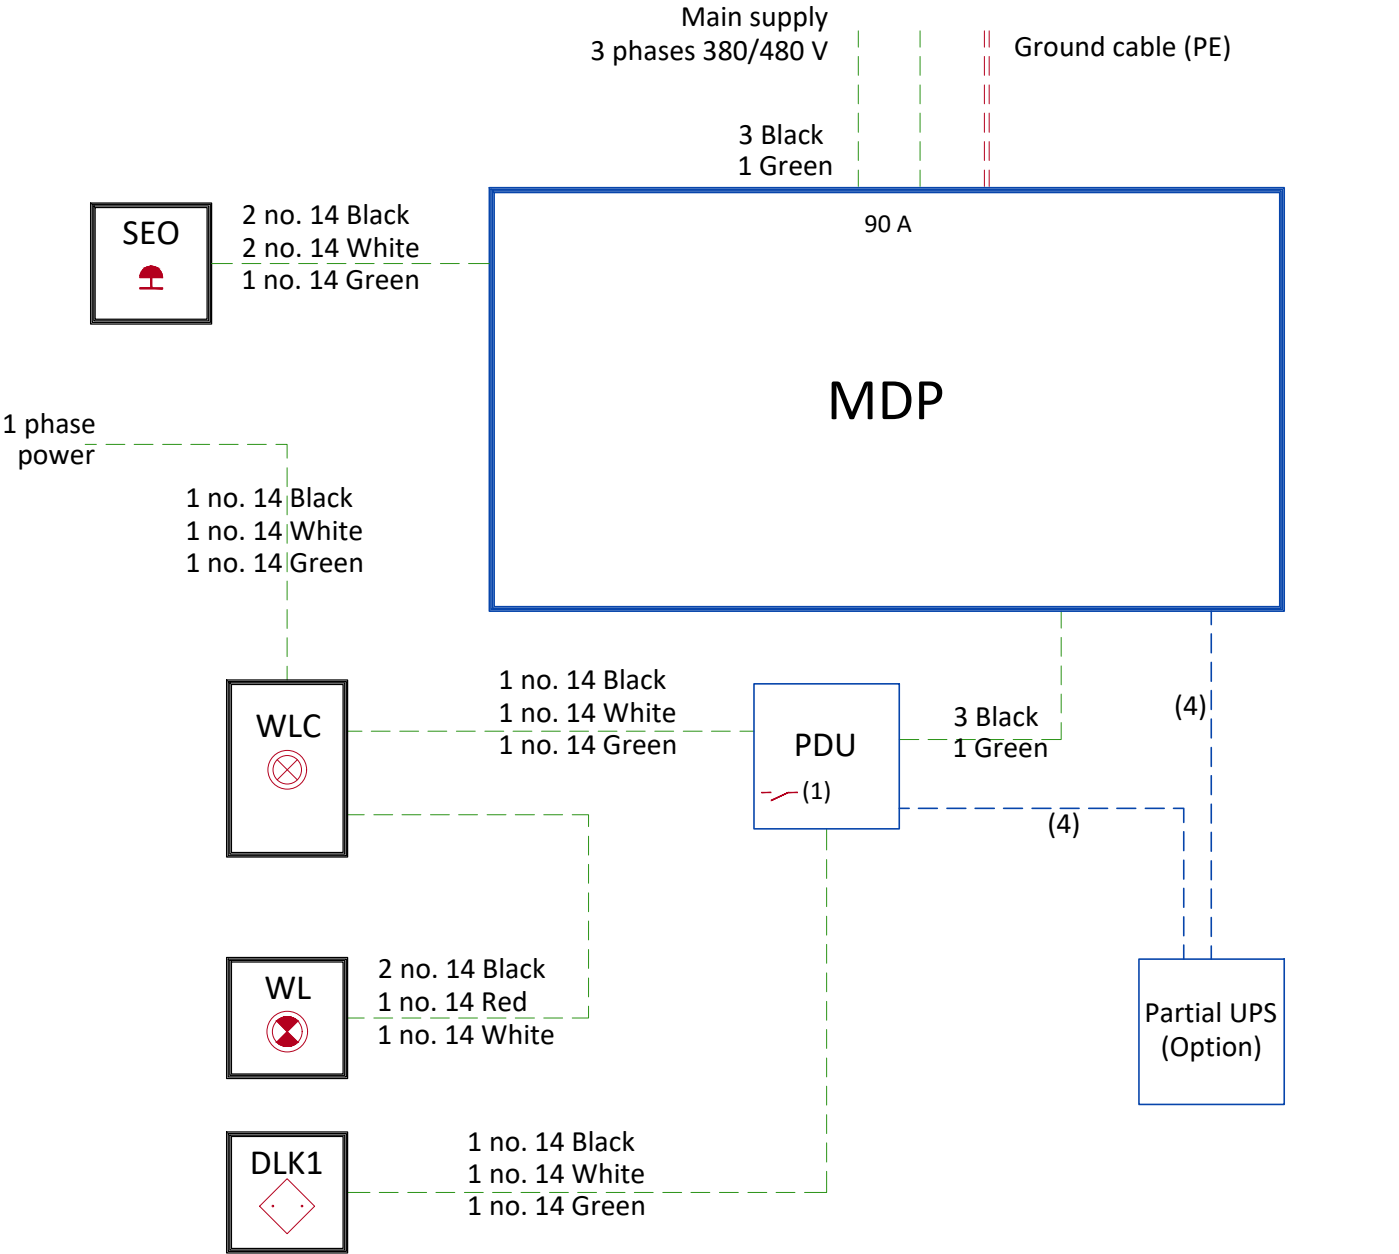


- MDP Main Disconnect Panel
PDU Power distribution unit
SEO Emergency OFF button (Control Room), located 1.50m (4.9') above floor
WLC Warning Light Control
WL Warning Light
DLK1 Door Interlock Switch (needed only if required by state/local codes)

--- Cable SUPPLIED BY
--- CUSTOMER
--- Cable SUPPLIED BY GE
--- Equipment SUPPLIED BY CUSTOMER
--- Equipment SUPPLIED BY GE


- Notes :
- (1) Two dry contacts: "System ON" and "X-Ray ON", both released by PDU.
Max. voltage = 30 V
- (2) If length < 10 m (32.8')
Cable with 2m (6.6') extra length on the floor behind the back of PDU
- (3) Cable with 2m (6.6') extra length on the floor behind the back of PDU
- (4) Cable delivered with partial UPS installed by GE (Option)

TYPICAL CABLE MANAGEMENT

FLUSH FLOOR DUCT

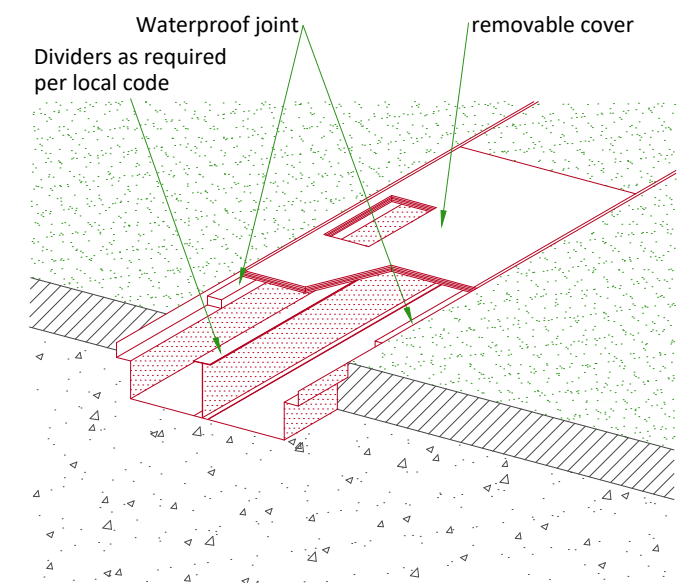

WALL DUCT

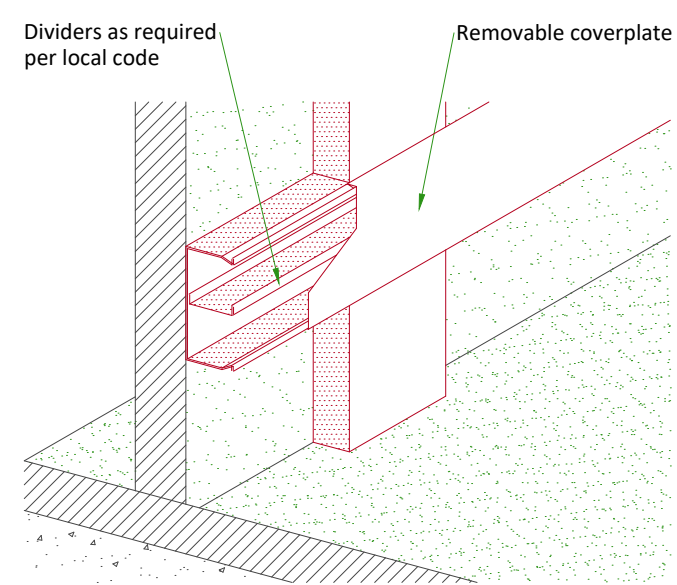

NOT TO SCALE

INTERCONNECTIONS

