

Versana Essential

Physical Dimensions and Weight (mm): Please Note: The picture may vary according to order configuration.

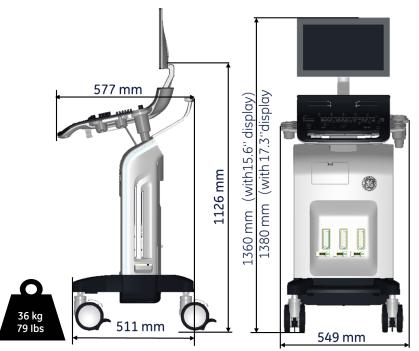

Recommended Ultrasound Room Layout 4.27 x 5.18 m (14 x 17 foot)

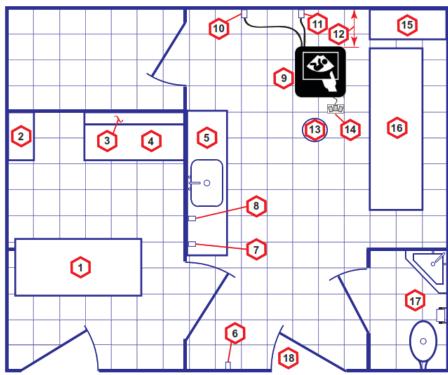

- Preparte ne de la constitución d **1.** Secretaries or Doctors Desk
- 2. File Cabinet
- 3. Film Viewer
- 4. Counter Top
- **5.** Counter Top and Sink with hot and cold
- 6. Overhead Lights Dimmer -
- Dual Level Lighting (bright and dim)
- 7. Emergency Oxygen
- 8. Suction Line
- 9. Ultrasound system
- 10. Dedicated Power Outlet -Circuit Breaker protected and easily accessible
- **11.** Network Interface
- 12. 457 mm (18 inches) distance of Ultrasound system from wall or objects
- **13.** Stool
- 14. Footswitch
- **15.** Storage for Linens and Equipment
- 16. Examination Table 1930 x 610 mm (76 x 24 inches)
- 17. Lavatory and Dressing Room 18. Door at least 762 mm (30 inches)

External Inputs and Outputs:













1920x1080 1920x1080

Pal-864x625 NTSC-858x525

Environmental Requirements

Operating Temperature	3 to 40 C (38 to 104 F)
Operating Humidity	30 to 80 % rH, non-condensing , Pressure : 700 –1060 hPa
Heat Dissipation	3800 BTU/hour + 300 Btu for each person. Without lights, other equipment etc.
Storage Temperature	-5 to 50 C (-23 to 122 F) ,
Storage Humidity	10 % - 90 % rH, non-condensing , Pressure : 700 -1060 hPa
	Combination lighting system (dim/bright) is recommended. Keep in mind that lighting controls and dimmers can be a source of EMI which

Electrical Specifications

Voltage	100-240 VAC ±10% 50/60 Hz
Power Consumption	Max 300 VA
Site Power Outlets	A dedicated AC power outlet must be within reach of the unit without extension cords
Power outage may occur	Requires a dedicated single branch circuit. To avoid circuit overload and possible loss of critical care equipment, make sure you DO NOT have any other equipment operating on the same circuit.
Acoustic Noise output	47 dB(A)

Lighting

could degrade image quality