
Versana Premier

Physical Dimensions and Weight (mm) : Please Note: The picture may vary according to order configuration.

External Inputs and Outputs :

Environmental Requirements

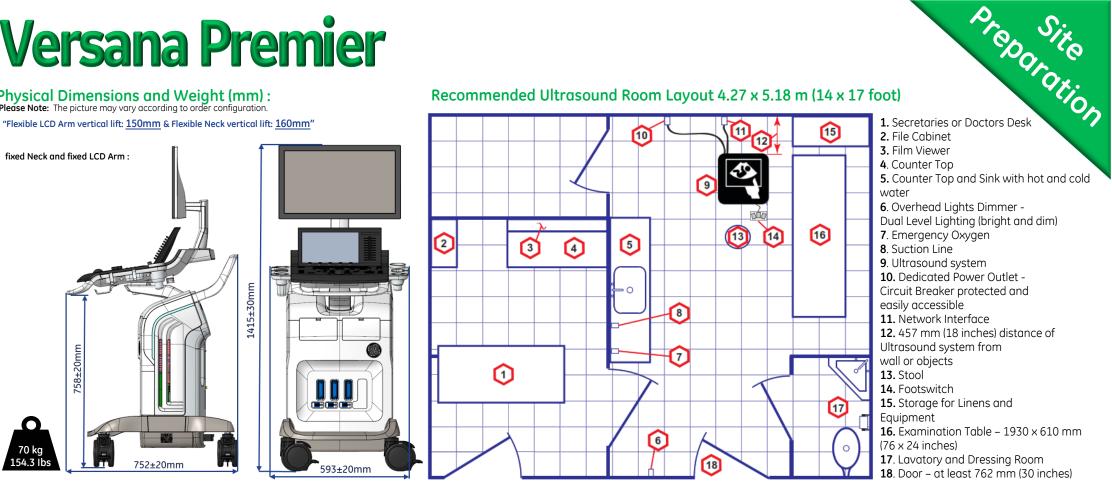

Recommended Ultrasound Room Layout 4.27 x 5.18 m (14 x 17 foot)

		_
Electrica	l Speci	fications

Operating Temperature	3 to 40 C without battery (37.4 to 104 F) 10—30 C with battery (50-86 F)	Voltage	100-240 VAC ±10% 50/60 Hz
Operating Humidity	30 to 80 % rH, non-condensing , Pressure : 700 –1060 hPa		
	3800 BTU/hour + 300 Btu for each person.	Power Consumption	Max 450 VA
Heat Dissipation	Without lights, other equipment etc.		A dedicated AC power outlet must be within reach of the unit without
Storage Temperature	-5 to 50 C (-23 to 122 F) .	Site Power Outlets	extension cords
Storage Humidity	10 % - 90 % rH, non-condensing , Pressure : 700 –1060 hPa	Power outage may occur	Requires a dedicated single branch circuit. To avoid circuit overload and possible loss of critical care equipment, make sure you DO NOT have any other equipment operating on the same circuit.
	Combination lighting system (dim/bright) is recommended. Keep in		
Lighting controls and dimmers can be a source of EMI which could degrade image quality.		Acoustic Noise output	43 dB(A)

Please Note: For more information please refer to the product's service & user manuals.

наті

1920x1080

VGA

.....

1920x1080

S-Video

 \odot

Pal-864x625

NTSC-858x525