




## IMPORTANT CUSTOMER READINESS ALERT:


THIS EQUIPMENT INVOLVES THE USE OF RADIOACTIVE ISOTOPES, INCLUDING THOSE SOURCES NECESSARY FOR EQUIPMENT CALIBRATION. APPROPRIATE REGULATORY COMPLIANCE AND LICENSING MUST BE ARRANGED BY THE CUSTOMER EARLY IN THE PLANNING PROCESS AND THEN DEMONSTRATED/AVAILABLE FOR EQUIPMENT INSTALLATION.

ASSIGNED BY THE HOSPITAL NET ADMIN IF CONNECTING TO THE HOSPITAL LAN	HOSTNAME	IP	AE TITLE	DICOM PORT
ACQUISITION HOST				
PROCESSING HOST				
HARDCOPY HOST				
LAN NET MASK				
GATEWAY TO OTHER NETWORKS				
OTHER				
HUB OR SWITCH				

- PREPARE ADEQUATE NETWORK SOCKETS IN THE PROPER LOCATIONS TO SUPPORT ALL ACQUISITION, LOCAL AND REMOTE WORKSTATION.
- IT DEPARTMENT MUST ASSIGN DEDICATED IP ADDRESSES (NOT DHCP) NOTE THE ADDRESSES BELOW FOR THE ACQUISITION, LOCAL AND REMOTE WORKSTATIONS.
- PREPARE BROADBAND CONNECTIVITY LINE AND DEDICATED IP ADDRESSES FOR INSITE CONNECTIVITY.
- REFER TO TABLE ON A1 PAGE

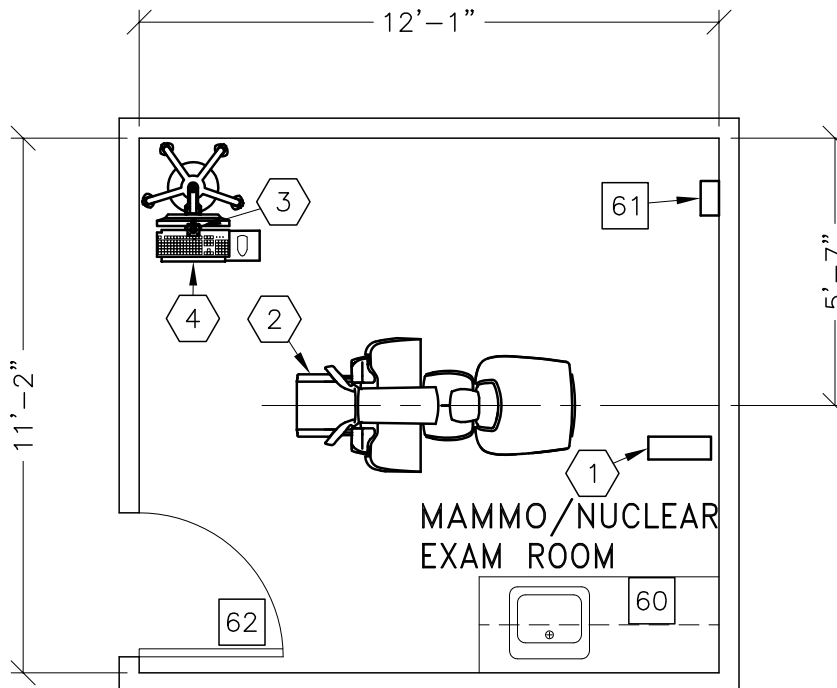

ROOM DIMENSIONS	LENGTH & WIDTH	CEILING HEIGHT
MINIMUM:	Refer to Pre-Installation Manual	



SEE APPENDIX "A" FOR POWER SPECIFICATIONS

ROOM PLAN LOCATED ON PAGE 7-80

ITEM	QUANTITY	ITEM DESCRIPTION	WEIGHT	HEAT OUTPUT
①	1	1.5 KVA UPS SYSTEM	39 lbs	
②	1	DISCOVERY NM 750b GANTRY	859 lbs	849 btu
③	1	EMO PUSHBUTTON		
④	1	DISCOVERY NM 750b AQUISITION CONSOLE ON MOBILE CART	33 lbs	510 btu
<p>*****  <b>CUSTOMER/CONTRACTOR SUPPLIED AND INSTALLED ITEMS</b>            *****</p>				
⑥0	COUNTER TOP WITH SINK, BASE AND WALL CABINETS			
⑥1	MAIN DISCONNECT, REFERENCE JUNCTION POINT 'A' ON SHEET E1 FOR DETAILED DESCRIPTION			
⑥2	MINIMUM DOOR OPENING FOR EQUIPMENT DELIVERY IS 36 IN. W x 83 IN. H [914mm x 2108mm], CONTINGENT ON A 96 IN. [2438mm] CORRIDOR WIDTH			

ENVIRONMENT

Ambient Operation Temperature: 64-79° F [18-26° C]  
 Allowable Temperature Change: 5° F [3° C] per hour  
 Humidity: 30-60 percent non condensing  
 Allowable Humidity Change: 5 percent per hour  
 Max - Altitude: 7875 FT. [2400 M]